

# Hako

## acoustic booth

### Technical Data

- Ceiling - upholstered, equipped with lighting and exhaust fans;
- Upholstered wall - full, 75 mm thick, upholstered on both sides acoustic filling with sound isolation properties;
- Columns - 75x75 mm, powder coated;
- Shelf - 12 mm MDF, colour: black, can be mounted only to upholstered walls with 1000 mm width;
- Aluminium strips - 5 mm thick;
- Glass wall - toughened glass, 6 mm thick;
- Glass door - toughened glass, 8 mm thick, equipped with hinges, handle with a lock and gaskets system improving the acoustic properties of the booth;
- Floor - option with additional fee - melamine plate + acoustic covering (21mm thickness), colour: graphite;
- Fans: in-take (near the floor) - can be turned on and off, with adjustable fan speed. The exact location can be found on the shop drawings; exhaust - integrated with the ceiling lamp;
- Additional information: multi-layer walls structure ensure ideal acoustic isolation; the remarkable acoustic parameters have been confirmed through a research done by an accredited laboratory in accordance with ISO 23351-1:2020 acquiring a certificate with the DS,A result of 25,7 dB; air function - fans work for additional 5 minutes after leaving the booth; maximum air-flow: 260 m<sup>3</sup>/h; volume 27,5 dB (A); LED SLIM panel, 60x60 cm, external power supply; 40W, 3200lm, 4000k, 220-240V AC, 120', RA>80, PF>0.9, white, STANDARD LINE;
- Dimensions: 1400 x 1350 mm, h. 2341 mm

### Selected configuration

#### HK01

**Height:** 2341 mm

**Width:** 1400 mm


**Length:** 1150 mm

**Colour of interior walls:** M-66010 Blue

**Colour of exterior walls:** M-66010 Blue

**Door:** Left door

**Floor:** No floor

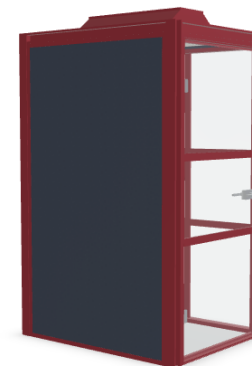

### Guarantee

.mdd products - 5 years.

Electrical components - 2 years.

### Assembly manuals



### Certificates



**Mediabox:** No mediabox

**Colour of the frame:** Red semi-matt RAL 3016

**Type of plug:** EU plug

---

## Sustainability

- Structural elements of the booths are powder-coated to reduce the emission of Volatile Organic Compounds.
  - Profiles of the Hako booths are made of aluminum and can be easily recycled.
- 

## Material composition

- MFC: 76%
- Wood: 5%
- Steel: 5%
- Glass: 8%
- Plastic: 3%
- Fabric: 2%
- Polyurethane foam: 2%

\*average values for a representative of the group.

---

## Recycled content

9%

---

## Recyclability

- Recycling: 12%
- Downcycling: 88%

\*average values for a representative of the group.

---

## Packaging

Materials: cardboard + foil + wooden crate


---

Recyclability: 100%

---

## Fabric technical data

### M-66010 Blue

|                                                                                   |                                       |                                                                                               |
|-----------------------------------------------------------------------------------|---------------------------------------|-----------------------------------------------------------------------------------------------|
|  | <b>Material</b>                       | 100% polyester                                                                                |
|                                                                                   | <b>Weight</b>                         | 364g/m2 • 510g/lm                                                                             |
|                                                                                   | <b>Abrasion resistance rubs</b>       | 75,000 Martindale cycles; 100,000 double rubs<br>wyzenbeek ASTM D4157                         |
|                                                                                   | <b>Pilling resistance</b>             | scale 1-5, max 5 • EN ISO 12945-2 4                                                           |
|                                                                                   | <b>Colour fastness to light</b>       | scale 1-8, max 8 • EN ISO 105 - B02 5-7                                                       |
|                                                                                   | <b>Colour fastness to rubbing</b>     | scale 1-5, max 5 • EN ISO 105x12 (wet/dry)<br>4-5/4-5                                         |
|                                                                                   | <b>Acoustic test sound absorption</b> | ISO 354                                                                                       |
|                                                                                   | <b>Flammability</b>                   | BS EN 1021 - 1:2006 (cigarette), BS EN 1021 -<br>2:2006 California Bulletin CAL 117-E-Class 1 |
|                                                                                   | <b>Fabric manufacturer's warranty</b> | 10 years                                                                                      |
|                                                                                   |                                       |                                                                                               |